


66500.1

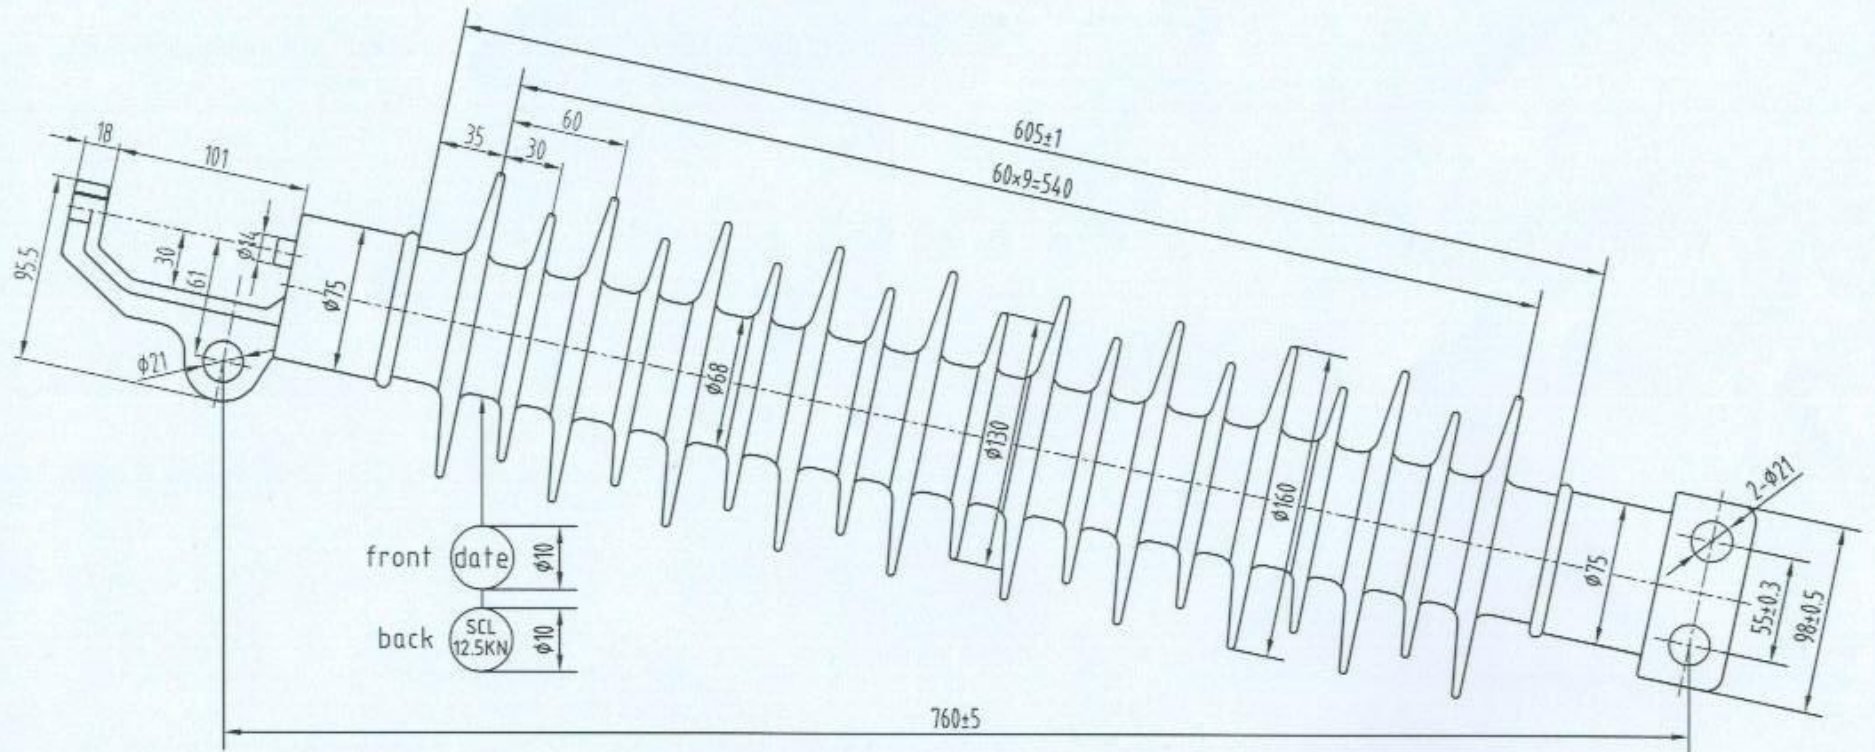

### SPECIFICATIONS

1. Nominal creepage distance: 1875mm
2. Power frequency wet withstand voltage: 160kV/min
3. Power frequency dry withstand voltage: 140kV/min
4. Lightning impulse withstand voltage: 325kV
5. Bending strength: 12.5KN
6. Dry arc distance: 645mm
7. Average thickness of zinc coat 900g/m<sup>2</sup>

				product type	FS-66/12.5L21-φ60×760	assembly drawing no	serial no	
				Cross arm composite insulator		66500.1		
						drawing mark	qty	wt
Marks/	item	dated	doc no	signature	changed	Date		
	Designer		zhuangdian		standard	initial		
	collator				examiner			
	assessor							
	technology					Date		
							10.55	1:3.5